


## TQM2K-75/B to TQM2K-90/B


IP20 chassis version soft start unit for bypass duty, contactor to be supplied and fitted by the user

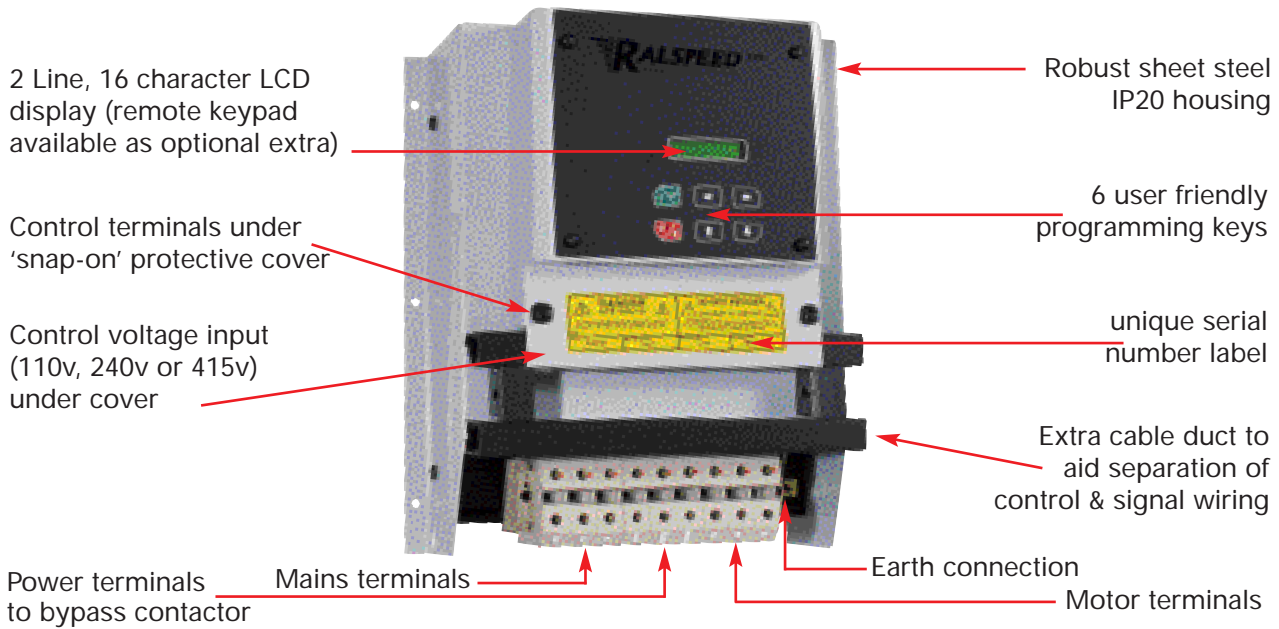

Technical Data	Ratings	
<b>KW rating</b>	75	90
<b>Mains power (R, S, T)</b>	110vAC to 415vAC +10%-10% (690v available as standard option)	
<b>Current rating (Amps) at 380v</b>	138	170
<b>Control supply L1 &amp; L2 (on PCB)</b>	110v / 220v / 440v User selectable and fully fused	
<b>Accel / Decel time - (Voltage ramp)</b>	1 to 240 seconds independently adjustable	
<b>Current limitation details</b>	Max current limit 600% of full load current Ramp to limit 1-10 sec, Current time out 10-60 sec	
<b>Starting torque</b>	25% to 70% of mains voltage - 5% steps	
<b>Stopping torque</b>	25% to 100% of mains voltage - 5% steps	
<b>Torque boost (kick start)</b>	70% of mains voltage adjustable from 200ms to 2sec	
<b>Max switching cycle</b>	12 even starts per hour with override in engineers menu	
<b>Dimensions H x W x D (in mm)</b>	400 x 340 x 220	
<b>Weights Kg (approximately &amp; unpacked)</b>	20	20
<b>Recommended AC1 rating of bypass</b>	150	250
<b>Power Terminals - size (sq mm)</b>	70	70
<b>Ambient / Storage temperature</b>	0°C ..... 45°C / -22°C ..... 75°C	
<b>Programmable Relays</b>	Overload, Underload, Thermistor, Service Over, Phase Fault, Firing Fault, External Trip, Overload Pre-alarm, Shearpin, Too many starts, Brake time over & Top of ramp	
<b>Programmable Inputs</b>	Inch, Reset Run Hours, External Trip, Brake Stop, Ramp Hold, Start Delay, Soft Stop, Local/Remote, Em Stop, Reset & Heatsink over Temperature	
<b>Protection</b>	Electronic Overload with 5 Selectable Curves, Underload, Thermistor Trip Circuit, Phase Fault, Thyristor Fault, Overload Pre-Alarm Too many starts, Emergency stop input & electronic "Shearpin"	
<b>Information Screens</b>	Motor Running - Time & Date, Ambient Temperature, Motor Amps (both digital & bar graph), 1000 Event Data-log (Downloading), Service Interval & Run Hours	

Note: Due to continuous improvement & development, sizes & specification may change without notice - always check with factory before ordering.

# TQM2K-75/B to TQM2K-90/B

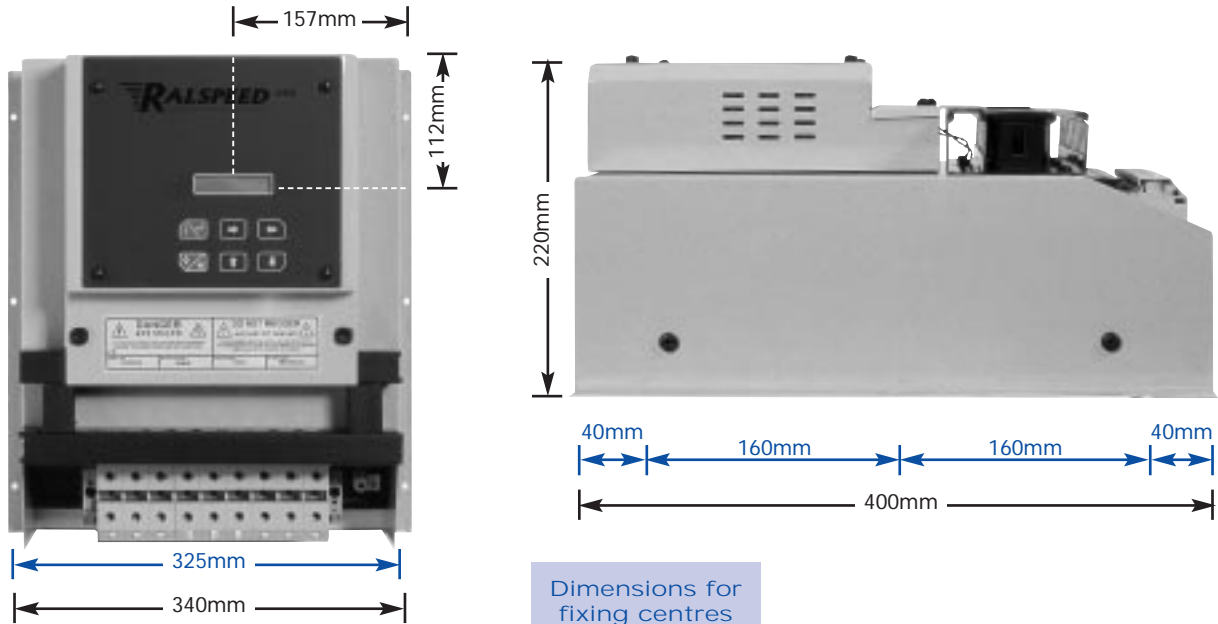

Dimensions for fixing centres  
(blue text)

