


## TQM2KB-11 to TQM2KB-55


IP20 chassis version soft start unit for bypass duty, contactor to be supplied and fitted by Ralspeed

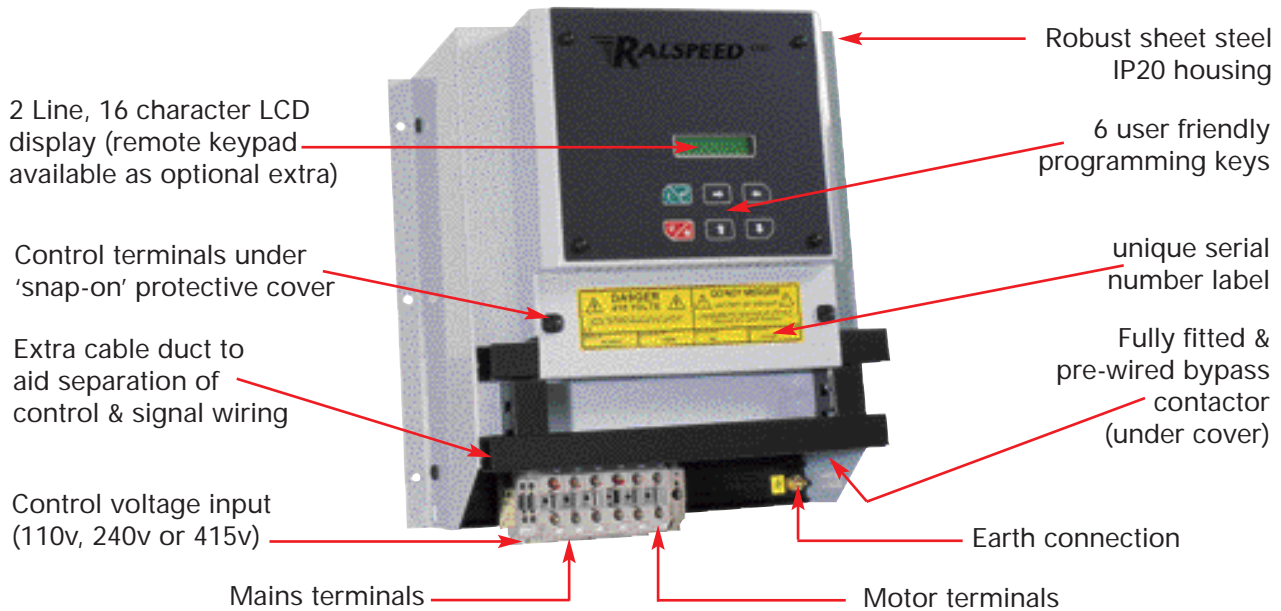

Technical Data	Ratings							
<b>KW rating</b>	11	15	22	30	37	45	55	
<b>Mains power (R, S, T)</b>	110vAC to 415vAC +10%-10% (690v available as standard option)							
<b>Current rating (Amps) at 380v</b>	22	30	44	60	72	85	105	
<b>Control supply L1 &amp; L2 (on PCB)</b>	110v / 220v / 440v User selectable and fully fused							
<b>Accel / Decel time – (Voltage ramp)</b>	1 to 240 seconds independently adjustable							
<b>Current limitation details</b>	Max current limit 600% of full load current Ramp to limit 1-10 sec, Current time out 10-60 sec							
<b>Starting torque</b>	25% to 70% of mains voltage – 5% steps							
<b>Stopping torque</b>	25% to 100% of mains voltage – 5% steps							
<b>Torque boost (kick start)</b>	70% of mains voltage adjustable from 200ms to 2sec							
<b>Max switching cycle</b>	12 even starts per hour with override in engineers menu							
<b>Dimensions H x W x D (in mm)</b>	365 x 340 x 250							
<b>Weights Kg (approximately &amp; unpacked)</b>	10	10	10	10	15	15	15	
<b>Power Terminals</b>	10	10	16	35	35	35	35	
<b>Ambient / Storage temperature</b>	0°C ..... 45°C / -22°C ..... 75°C							
<b>Programmable Relays</b>	Overload, Underload, Thermistor, Service Over, Phase Fault, Firing Fault, External Trip, Overload Pre-alarm, Shearpin, Too many starts, Brake time over & Top of ramp							
<b>Programmable Inputs</b>	Inch, Reset Run Hours, External Trip, Brake Stop, Ramp Hold, Start Delay, Soft Stop, Local/Remote, Em Stop, Reset & Heatsink over Temperature							
<b>Protection</b>	Electronic Overload with 5 Selectable Curves, Underload, Thermistor Trip Circuit, Phase Fault, Thyristor Fault, Overload Pre-Alarm Too many starts, Emergency stop input & electronic "Shearpin"							
<b>Information Screens</b>	Motor Running - Time & Date, Ambient Temperature, Motor Amps (both digital & bar graph), 1000 Event Data-log (Downloadable), Service Interval & Run Hours							

Note: Due to continuous improvement & development, sizes & specification may change without notice - always check with factory before ordering.

# TQM2KB-11 to TQM2KB-55

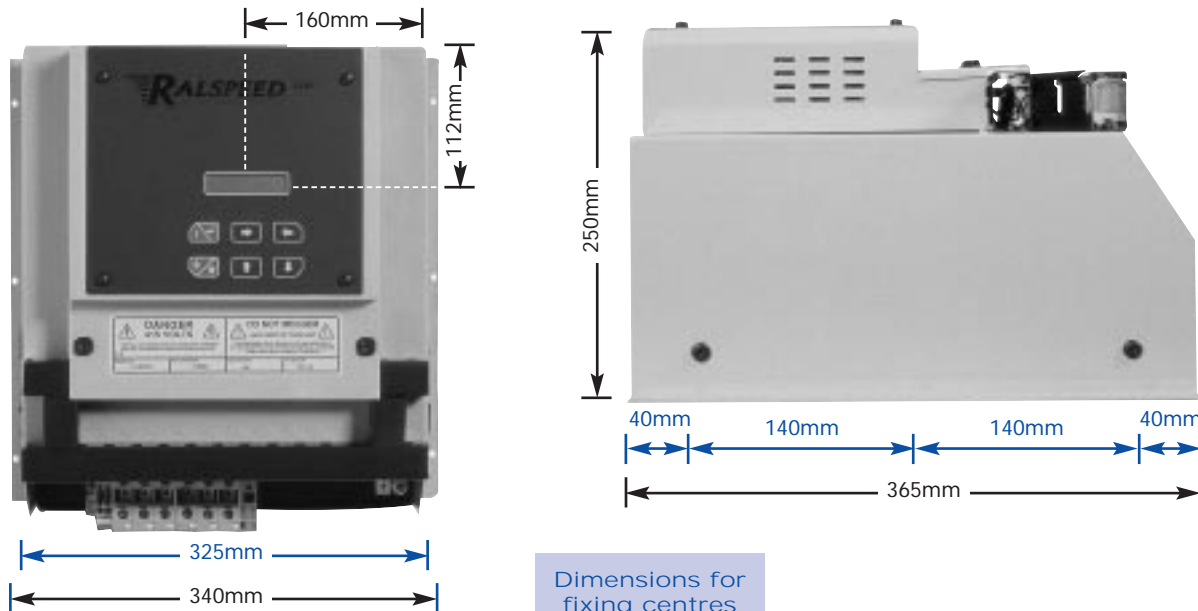

Dimensions for fixing centres  
(blue text)

